


Super Facloc

Bolt seals

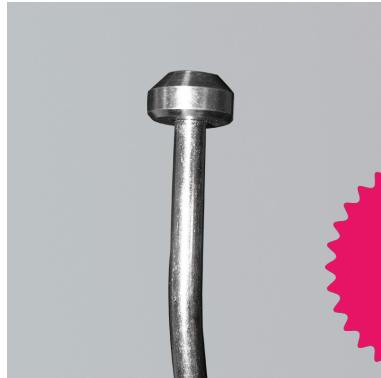

#ONGLET:DESCRIPTIF#

This hardened steel bolt seal is the most resistant to cutting and bending

The pin head is 9 mm diameter and 150 mm long. The base is 22 mm diameter and 25 mm long.

They are both made of SAE1045 steel, which hardness is RC 40-48.

Its tensile strength is 3500 kg and it resists to 4500 kg bending.

This model is conform with [ISO/17712H](#)

The marking is available with 2 lines of up to 5 characters and 6 digits (12 weeks leadtime)

We have some Superfaclocs in stock, marked E.F and numbered.

100 pcs carton

Carton : 280 x 230 x 130 mm - 17 kg

Customs tariff : 83 09 90 90



Passage Saint Paul 16 - - 7700 - MOUSCRON - Belgique
Phone : +32(0)2/640.05.43 - Fax :
jimex.be - E-mail : info@jimex.be

Super Facloc

Bolt seals



Passage Saint Paul 16 - - 7700 - MOUSCRON - Belgique
Phone : +32(0)2/640.05.43 - Fax :
jimex.be - E-mail : info@jimex.be