


# Plastoseals

Traditional sealing

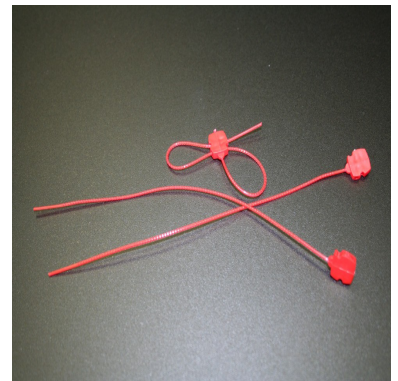

## Small polypropylen seal, to be crushed

This seal has a 10.31 x 10.92 mm head, a 1.2 mm x 172 mm long thread. It is mainly used for fire extinguishers, meters, valves

Its tensile strength is 3 kg. It resists to temperatures from -20° to +60°C.

UV proof, it complies with RoHS norms as well as EN3 norm regarding extinguishers.

It can be crushed with a 130mm pair of sealing pliers.

Are available in stock red, black and blue ; on request in 2 weeks : green, yellow, grey, orange, white

- *Conditionning : 300 pcs bundle*

- *Customs tariff : 39 23 50 90*

- *Free samples on request*



Passage Saint Paul 16 - - 7700 - MOUSCRON - Belgique

Phone : +32(0)2/640.05.43 - Fax :

jimex.be - E-mail : info@jimex.be